



STARPRIM



Models

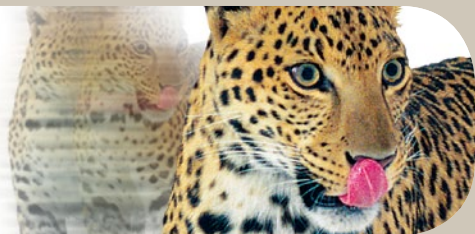

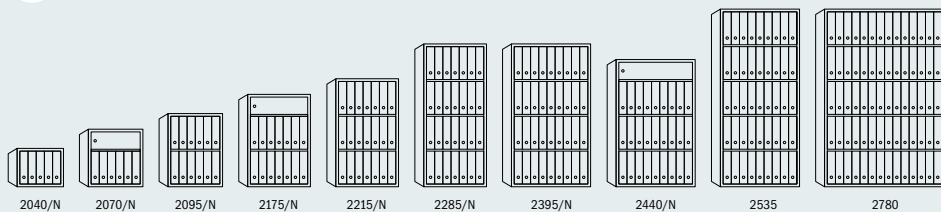

**Certified according to EN 1143-1
Security Grade II**

- ④ Three-way locking mechanism, with square bolts 40×10 mm, except models 2535 and 2780 – four-way locking mechanism, with solid-steel bolts with a diameter of 40 mm.
- ④ A continuous formed dog bar on the hinge side protects the safe in event of attack.
- ④ The door-frame is equipped with fire-resistant washer which protects safe interior against dust and direct irruption of flame, smoke and gases.
- ④ All safe models are able to be secured to a floor. Also provision for snap-off detector is installed.
- ④ Shelves are adjustable to every 50 mm, except models 2535 and 2780 – adjustable shelves to every 25 mm.
- ④ The hinges enable 205° door opening for full access.
- ④ Optimal File capacity. File acc. to DIN 821-D1-80 ($w_1=75$ mm).

④ **Measurements**

STARPRIM

MODEL	* External dimensions			Internal dimensions			Weight	Volume	Max. No. of Files
	Height [mm]	Width [mm]	Depth [mm]	Height [mm]	Width [mm]	Depth [mm]	Approx. [kg]	Approx. [liters]	
2040/N	430	460	450	334	380	305	137	39	5
2070/N	605	535	450	509	455	305	200	71	6
2095/N	790	535	450	694	455	305	247	96	12
2175/N	960	610	530	864	530	385	344	176	14
2215/N	1140	610	530	1044	530	385	397	213	21
2285/N	1495	610	530	1399	530	385	501	285	28
2395/N	1495	760	560	1399	680	415	599	395	36
2440/N	1320	760	675	1224	680	530	585	441	27
2535	1850	840	580	1720	730	415	815	521	45
**2780	1850	1190	580	1720	1080	415	1045	771	70

- * – 45 mm extra depth with handle and different locks.
- ** – Double doors.
 - Standard locking: 1 mechanical key lock according to EN 1300 Grade A.
 - Optional locks, inside equipment and additional equipment are evident from special STARPRIM Specification.

